


S5 Series



- ◆ Material: The main body is made of SS316 or SS304 stainless steel
- ◆ Length range: 100 ~ 2000 mm. It also can be customized according to your requirements.
- ◆ Mounting: SAE standard 5 holes, other mounting methods available.
- ◆ Accessories: -5 x M5 screws
-2 mm thick NBR gasket.
If installing on a gas tank, we recommend the optional 2mm thick FPM gasket.
- ◆ Protection rank: IP67

- Utilizing magnetic field to control the reed on-off switch, the product features a long service life and protection against vibration.
- Rated power: 125mW
- Max current: 500mA
- Wire: PVC material (PA corrugated pipe cover is optional)
- Connector: Delphi, Tyco, or others are available according to customer's requirements.
- Output signal: Resistance control signal, 0~190Ω, 240~33Ω, or customized as required; You can also choose current control signal, 0~20mA, 4~20mA or Voltage control signal, 0.5~4.5VDC, 0~5VDC.
- Resolution range: 10~40mm
- Operating temperature: -40°C ~ +85°C

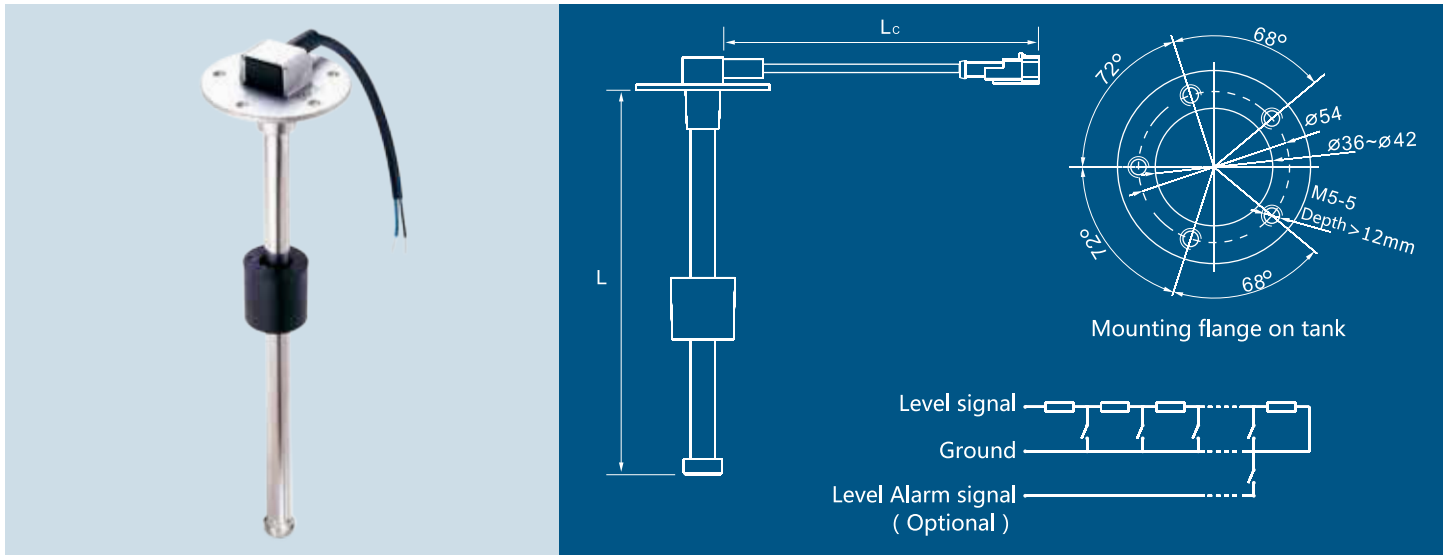

* Please contact us for more details.

S5/S3 Series

Art. No.	Product Name	Specification	
JS60055	S5-E150mm	Output Signal : 0~190Ω Mounting : SAE standard 5 holes Length of Wire : 460mm Gasket : NBR Alarm : No Material: SS316 Logo: KUS	
JS60057	S5-E200mm		
JS60059	S5-E250mm		
JS60061	S5-E300mm		
JS60063	S5-E400mm		
JS60065	S5-E500mm		
JS60067	S5-E600mm		
JS60069	S5-E700mm		
JS60071	S5-E800mm		
JS60073	S5-E900mm		
JS60075	S5-E1000mm		
JS60076	S5-E1100mm		
JS60077	S5-E1200mm		
JS60078	S5-E1300mm		
JS60079	S5-E1400mm		
JS60080	S5-E1500mm		
JS60081	S5-E1600mm		
JS60334	S5-U150mm		Output Signal : 240~33Ω Mounting : SAE standard 5 holes Length of Wire : 280mm Gasket : NBR Alarm : No Material : SS316 Logo : KUS
JS60336	S5-U200mm		
JS60338	S5-U250mm		
JS60340	S5-U300mm		
JS60342	S5-U400mm		
JS60344	S5-U500mm		
JS60346	S5-U600mm		
JS60348	S5-U700mm		
JS60350	S5-U800mm		
JS60352	S5-U900mm		
JS60354	S5-U1000mm		
JS60355	S5-U1100mm		
JS60356	S5-U1200mm		
JS60357	S5-U1300mm		
JS60358	S5-U1400mm		
JS60359	S5-U1500mm		
JS60360	S5-U1600mm		

Art. No.	Product Name	Specification	
JS61043	S3-E150mm	Output Signal : 0~190Ω Mounting : BSP 1 1/4" Thread Length of Wire : 460mm Gasket : NBR Alarm : No Material : SS316 Logo : KUS	
JS61045	S3-E200mm		
JS61047	S3-E250mm		
JS61049	S3-E300mm		
JS61051	S3-E400mm		
JS61053	S3-E500mm		
JS61055	S3-E600mm		
JS61057	S3-E700mm		
JS61059	S3-E800mm		
JS61061	S3-E900mm		
JS61063	S3-E1000mm		
JS61064	S3-E1100mm		
JS61065	S3-E1200mm		
JS61066	S3-E1300mm		
JS61067	S3-E1400mm		
JS61068	S3-E1500mm		
JS61069	S3-E1600mm		
JS61368	S3-U150mm		Output Signal : 240~33Ω Mounting : BSP 1 1/4" Thread Length of Wire : 280mm Gasket : NBR Alarm : No Material : SS316 Logo : KUS
JS61332	S3-U200mm		
JS61334	S3-U250mm		
JS61336	S3-U300mm		
JS61338	S3-U400mm		
JS61340	S3-U500mm		
JS61342	S3-U600mm		
JS61344	S3-U700mm		
JS61346	S3-U800mm		
JS61348	S3-U900mm		
JS61350	S3-U1000mm		
JS61351	S3-U1100mm		
JS61352	S3-U1200mm		
JS61353	S3-U1300mm		
JS61354	S3-U1400mm		
JS61355	S3-U1500mm		
JS61356	S3-U1600mm		

* Optional Flange :
Please refer to page 56 "Flange for mounting"

Remark: The length can be customized according to the tank height.